


## LED Indicators:

LED 1: Green, Ready/ Power LED 2: Yellow, Triggered

LED 3: Red, Fault Condition

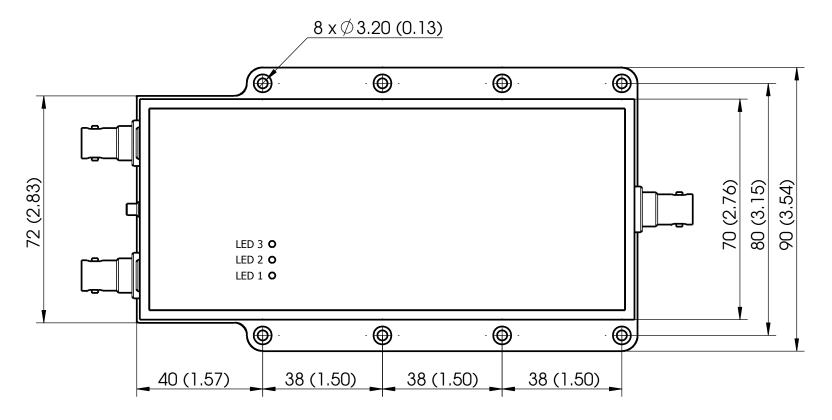

## Lemo, 4 pin (Control)

1: Control Input (3-10V) 2: Inhibit Input (L=Inhibit) 3: Fault Signal Out/ TTL 4: +5.00 VDC/ 500mA S: Shield, GND, Return

Lemo, 3 pin (Option HFS)


Sheet: 1 / 1

<sup>2</sup> ≥ HFS MODE ONLY: 1: V1 IN +15 VDC

1: V1 IN +15 VDC (±3%) 2: V2 IN +120 VDC (±3%) 3: Ground, Return

NOTE: HFS MODE DOES NOT REQUIRE A +5V SUPPLY

Drawing (projection) according to DIN standards. All dimensions in mm and (inches). All data and dimensions subject to change without notice.



Modification	Date	Name	Drawn	GAL	FSWP 91-01 1
			Verified		
			Date	17.03.2016	Options: GCF, FLIN, I-PC
BEHLKE POWER ELECTRONICS GMBH					Drawing:

HIGH-TECH IN HIGH VOLTAGE Phone +49 (0) 6173-9290-20, www.behlke.co